

# Loose Tube Dielectric Armored Double-Jacket Slim Cable Dry / PP

## FOSPC-XXX-X-DJADYD-FT001-EX/ 2-432 Fibers


### Applications



Outdoor



Duct Installation



Lashed

### Protections



UV Resistant



Water Blocking

Rodent  
DeterrentLOOSE TUBE DIELECTRIC ARMORED DOUBLE-JACKET SLIM  
CABLE DRY 72F G652.D FIBER FT

### Description

Waveoptics® Loose Tube Dielectric Armored Double-Jacket Slim Cable Dry is an all-dielectric cable designed for aerial (lashed) and duct installations. Reduced weight design and smaller diameter allows the usage of smaller ducts.

Loose tubes made of PP are more flexible and allow an easier installation and routing. Dry water blocking technology allows a cleaner and quicker installation as well as a cost-friendly cable preparation.

MDPE outer jacket with additives makes a resistant and durable cable, providing superior protection against UV radiation, fungus, abrasion and other environmental factors, with added hardness. The inner jacket is made of MDPE for an easy strip.

The SZ-stranded method for loose tubes and four ripcords ensure a quick and easy mid-span access.

Dielectric central strength member requires no bonding or grounding. Double jacket design and dielectric armoring made of glass yarns that offers improved mechanical properties, and acts as a small rodent deterrent, while maintaining flexibility.

### Quality

Waveoptics® is a ISO-9001:2015 certified company.

We meet or exceed the following international standards:

- Telcordia GR-20: Generic requirements for optical fiber and optical fiber cable.
- IEC 60794: Basic requirements for optical fiber and cable elements.
- ANSI/ICEA S-87-640: Standard for optical fiber outside plant communications cable.

Each Waveoptics® cable meets the highest quality standards in the industry and contains a compliance certificate in which the performed tests in our quality laboratory are physically attached.

Folio PE-089-01-EN

Last Review 4/22/2022

[www.waveoptics.net](http://www.waveoptics.net)


[info@waveoptics.net](mailto:info@waveoptics.net)


# TECHNICAL DATA SHEET

## OUTDOOR CABLE

FOSPC-XXX-X-DJADYD-FT001-EX/ 2-432 Fibers

### Dimensions & Properties

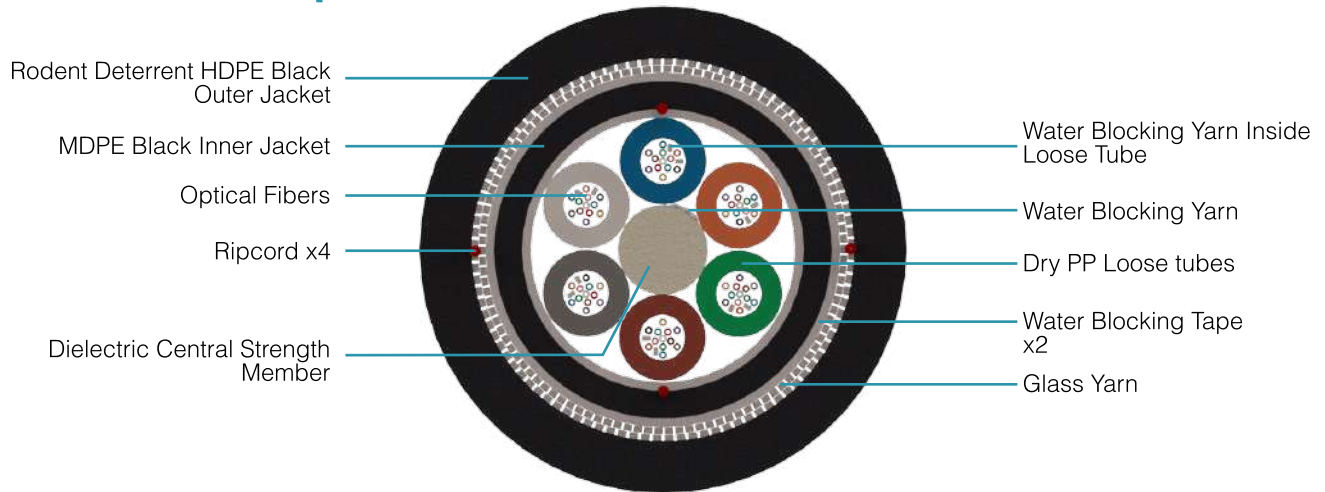

Design	
Fiber per Tube	2 - 12
Fiber Color Code / Loose Tube Color Code	
Dielectric Central Strength Member	FRP
Peripheral Strength Member	Glass Yarn
Outer Jacket Material / Thickness	Rodent Deterrent HDPE / 1.5 mm (0.06 in)
Inner Jacket Material / Thickness	MDPE / 0.8 mm (0.03 in)
Loose Tube Material / Diameter	PP / 1.9 mm (0.07 in)
Drum Length	10,000 ft & 20,000 ft (±5%)
Temperature Range	
Operation	-40°C to 70°C (-40° F to 158° F)
Installation	-30°C to 70°C (-22° F to 158° F)
Storage / Transport	-40°C to 70°C (-40° F to 158° F)
Mechanical Properties	
Crush Resistance (Short-Term / Long-Term)	3,000 N /100 mm / 1,500 N/100 mm
Minimum Bend Radius (Operation / Installation)	10 x OD / 20 x OD

Note: Waveoptics recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

**Folio PE-089-01-EN**

**Last Review 4/22/2022**

# TECHNICAL DATA SHEET

## OUTDOOR CABLE

FOSPC-XXX-X-DJADYD-FT001-EX/ 2-432 Fibers

### Dimensions & Properties

Fiber Count	Loose Tube / Fillers	Cable Weight (kg/km) (lb/kft) (±10%)	Tensile Strength (N) (lbf) Long-Term/Short-Term	Nominal Outer Dimensions (mm) (in) (±5%)	Dielectric Central Strength Member Diameter (mm) (in) (Without PE / With
2 - 12	1/5	113 (76)	890/2,700 (200/607)	11.9 (0.47)	2 (0.08)
24	2/4	113 (76)	890/2,700 (200/607)	11.9 (0.47)	2 (0.08)
36	3/3	113 (76)	890/2,700 (200/607)	11.9 (0.47)	2 (0.08)
48	4/2	113 (76)	890 / 2,700 (200/607)	11.9 (0.47)	2 (0.08)
60	5/1	113 (76)	890/2,700 (200/607)	11.9 (0.47)	2 (0.08)
72	6/0	113 (76)	890/2,700 (200/607)	11.9 (0.47)	2 (0.08)
96	8/0	122 (82)	890/2,700 (200/607)	13.1 (0.52)	3.2 (0.13)
144	12/0	176 (118)	890/2,700 (200/607)	15.3 (0.6)	3/5.5 (0.12 / 0.22)
192	16/2	189 (127)	890/2,700 (200/607)	16.20 (0.64)	2 (0.08)
216	18/0	189 (127)	890/2,700 (200/607)	16.20 (0.64)	2 (0.08)
288	24/0	219 (147)	890/2,700 (200/607)	17.90 (0.7)	2.6/3.7 (0.10 / 0.14)
432	36/0	266 (179)	890/2,700 (200/607)	20.50 (0.8)	2 (0.08)

### Printed Information on Outer Jacket

= /MONTH/YEAR/ WAVEOPTICS OPTICAL CABLE = = DJADYD = = PP = =  = = /FIBER TYPE/= = /FIBER COUNT/= = /FEET\*/ FT= = /LOT# /=

- Printed in white and resistant to physical tests on marking
- Marking interval: every 2 feet + 1%
- The marking can be changed according to customer requirements

Folio PE-089-01-EN

Last Review 4/22/2022

[www.waveoptics.net](http://www.waveoptics.net)


[info@waveoptics.net](mailto:info@waveoptics.net)

# TECHNICAL DATA SHEET

## OUTDOOR CABLE

FOSPC-XXX-X-DJADYD-FT001-EX/ 2-432 Fibers

### Drum Dimensions and Pallet Packaging Information

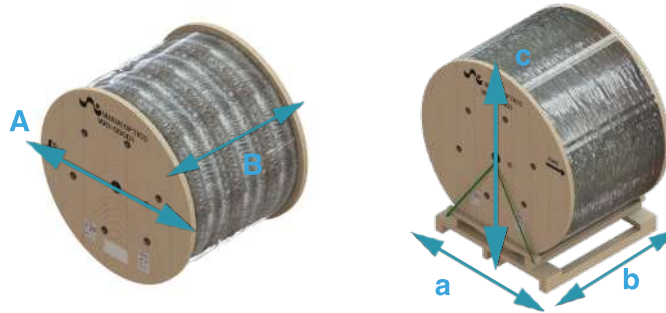

Drum Length (ft) (m) (±5%)	Fiber Count	A (mm) (in) (± 5%)	B (mm) (in) (± 5%)	Drum and Pallet Total Weight (kg) (lb) (± 10%)	Total Packaging(± 5%)		
					a (mm) (in)	b (mm) (in)	c (mm) (in)
10,000 (3,048)	2-72	1,200 (47)	900 (35)	495 (1,092)	1,200 (47)	1,168 (46)	1,321 (52)
	96	1,250 (49)	1,000 (39)	539 (1,188)	1,250 (49)	1,219 (48)	1,371 (54)
	144	1,470 (58)	1,000 (39)	755 (1,664)	1,470 (58)	1,219 (48)	1,591 (63)
	192 - 216	1,650 (65)	1,000 (39)	829 (1,827)	1,650 (65)	1,219 (48)	1,771 (70)
	288	1,650 (65)	1,000 (39)	920 (2,028)	1,650 (65)	1,219 (48)	1,771 (70)
	432	1,770 (70)	1,000 (39)	1,074 (2,368)	1,770 (70)	1,219 (48)	1,891 (74)
20,000 (6,096)	2-72	1,650 (65)	1,000 (39)	941 (2,075)	1,650 (65)	1,219 (48)	1,771 (70)
	96	1,650 (65)	1,000 (39)	996 (2,196)	1,650 (65)	1,219 (48)	1,771 (70)
	144	1,770 (70)	1,000 (39)	1,336 (2,946)	1,770 (70)	1,219 (48)	1,891 (74)
	192-216	1,950 (77)	1,000 (39)	1,488 (3,281)	1,950 (77)	1,219 (48)	2,071 (82)
	288	2,060 (81)	974 (38)	1,703 (3,755)	2,060 (81)	1,219 (48)	2,181 (86)

Note 1: Please contact your sales agent for higher fiber counts or different drum lengths available.

Note 2: All documentation included in each drum of cable is in english, if a different language is needed, please contact your sales agent.

**All drums include:\***

1. Drum handling instructions
2. Test report certificate
3. Product description (weight, dimensions, lot and part number)
4. End cable marking
5. Both ends include end caps to protect against humidity

**Folio PE-089-01-EN**

**Last Review 4/22/2022**

# TECHNICAL DATA SHEET OUTDOOR CABLE

FOSPC-XXX-X-DJADYD-FT001-EX/ 2-432 Fibers

## Transmission Performance by Fiber Type

Fiber Type	Single Mode				Multi Mode			
Waveoptics® Fiber Type	G652.D	G657.A1	G657.A2	G655.C	OM1	OM2	OM3	OM4
Waveoptics® Fiber Code	F	T	E	G	B	L	M	P
OFS® Fiber Type	G652.D	AllWave® FLEX	-	-	-	-	-	-
OFS® Fiber Code	1	2	-	-	-	-	-	-
Wavelength (nm)	1310/1550			1550/1625	850/1300			
Max. attn. (dB/km) (1)	0.35/0.25	0.35/0.25	0.4/0.3	0.25/0.27	3.4/1	3/1		
Min. Bandwidth (MHz*km) (2)	-				200/500	750/500	1500/500	3500/500
1-Gigabit Ethernet Distance (m) (3)	-				300	750	>550	>550
10-Gigabit Ethernet Distance (m) (4)	-				-	150	300	400
40/100-Gigabit Ethernet Distance	-				-	-	100/70	150/100
Cable Marking Specifications	G652.D	G657.A1	G657.A2	G655.C	OM1	OM2	OM3	OM4

**Notes:**

- (1) Maximum attenuation after cabling process
  - (2) OFL (overfilled launch) bandwidth measurement
  - (3) 1-Gb/sat 850 nm transmissions based on IEEE 802.3z test protocol
  - (4) 10-Gb/sat 850 nm transmissions based on IEEE 802.3ae test protocol
  - (5) 40/100-Gb/sat 850 nm transmissions based on IEEE P802.3ba test protocol
- \*For more information about the optical fibers, consult the corresponding data sheets.

## Part Number Configuration

# FOSPC-XXX-X-DJADYD-FT001-US

### Fiber Count

- 002- 2 Fibers
- 004- 4 Fibers
- 006- 6 Fibers
- 008- 8 Fibers
- 012- 12 Fibers
- 024- 24 Fibers
- 036- 36 Fibers
- 048- 48 Fibers
- 060- 60 Fibers
- 072- 72 Fibers
- 096- 96 Fibers
- 144 -144 Fibers
- 192- 192 Fibers
- 216- 216 Fibers
- 288- 288 Fibers
- 432- 432 Fibers

### Waveoptics® Fiber Type

- F - SM G652.D
- T - SM G657.A1
- E - SM G657.A2
- G - SM G655.C
- B - MM OM1
- L - MM OM2 TRUE BEND
- M - MM OM3 TRUE BEND
- P - MM OM4 TRUE BEND

### OFS® Fiber Type

- 1 - SM G652.D
- 2 - AllWave® FLEX

### Optical Cable Compliance

- US- Waveoptics® Standard
- AC- Buy American Act Compliance

Note: please contact your Waveoptics® distributor if you need any additional compliance or if you have questions about the part number configuration.

Folio PE-089-01-EN

Last Review 4/22/2022